


## \* NOTICES \*

JPO and INPIT are not responsible for any damages caused by the use of this translation.

1. This document has been translated by computer. So the translation may not reflect the original precisely.
2. \*\*\*\* shows the word which can not be translated.
3. In the drawings, any words are not translated.

## DRAWINGS

[Drawing 1]

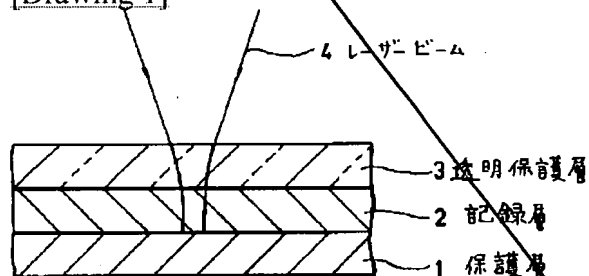

[Drawing 2]

	フレキシブル光ディスク			コンパクトディスク
	$\lambda: 500(\text{nm})$ , NA: 0.6			$\lambda: 780(\text{nm})$ , NA: 0.45
	t: 500( $\mu\text{m}$ )	t: 100( $\mu\text{m}$ )	t: 50( $\mu\text{m}$ )	ディスク厚: 1/2 (mm)
焦点深度( $\mu\text{m}$ )	1.39	1.39	1.39	3.65
許容スリット傾斜角( $^\circ$ )	0.384	1.92	3.84	0.6
ディスク厚誤差( $\mu\text{m}$ )	$\pm 20$	$\pm 20$	$\pm 20$	$\pm 100$
訂正長欠陥長(mm)	8.16 · 1.36	8.16 · 1.36	8.16 · 1.36	8.16 · 1.36
複屈折 (nm)	42	8.3	4.2	100
相対ディスク厚誤差(%)	$\pm 4$	$\pm 20$	$\pm 40$	$\pm 8.3$

[Drawing 3]

$$\theta = 1.92^\circ$$

2x  
cd

5x  
cd